

Welcome to the family

CCI 800

EN

CCI-SOBUS
team play works.

Welcome to the family





Focused Layout

With its 8 "widescreen display, the CCI 800 offers the optimal size to focus on one application. Unique in its class is to display two additional applications without overlapping your main application.






Multi Touch

The CCI 800 sets new standards in the operation of modern ISOBUS machines.

Multi Touch in conjunction with the operating concept of CCI.OS offers an easy operation on smartphone level.



Universal Terminal


One terminal, a thousand possibilities. With Universal Terminal you can operate a variety of machines. Today and in the future.





GPS Precision


With Section Control up to 254 sections and the Rate Control with 32 Control Points there are no limits for precision. Control Points allow to control each dosing unit with different values. Tramline Control generates tram lines automatically via GPS.

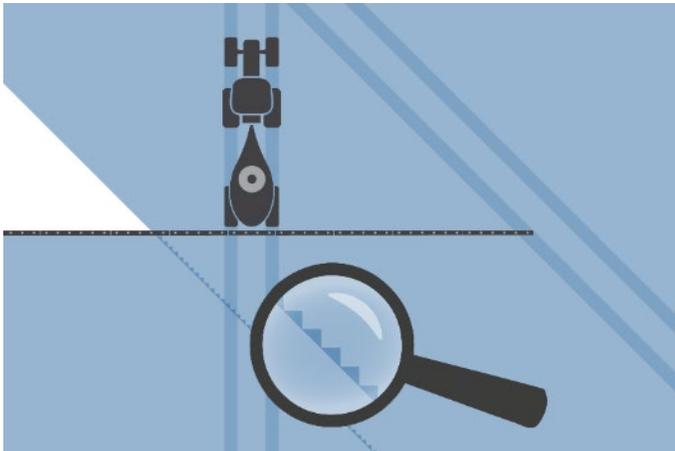

Section Control




Rate Control

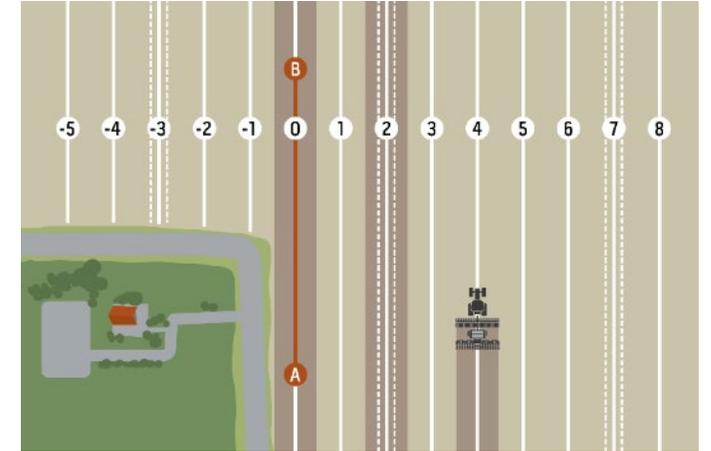

Tramline Control

Details

All functionalities at a glance



Focused Layout

Stay focussed on your main application



Section Control

254 sections controlled
precise and automatic



Task Control

Documentation with ISO-XML



Multi Touch

Operating on smartphone
level



Rate Control

Side-specific application
based on maps



Parallel Tracking

Parallel driving aid



Universal Terminal

Operate various ISOBUS
machines



Tramline Control

Tramlines generated with GPS




Convert

Connection to N-Sensors



Help System

Help when you need it



Camera


Automatic rear view camera



Tecu

Tractor data

Task Control


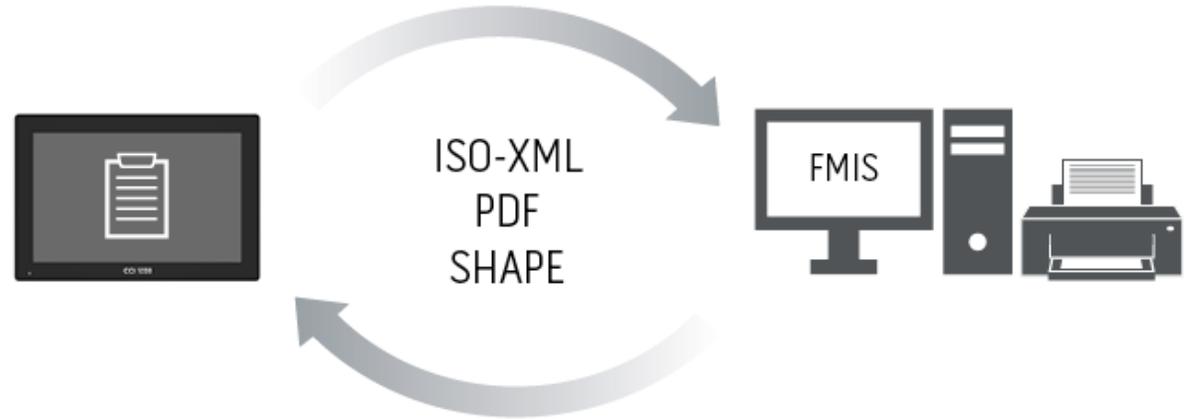


Never forget the USB stick.
Connect your CCI 800 with the agrirouter and conveniently transfer application maps and tasks via the Internet.

- tasks (ISO-XML)
- application maps (ISO-XML and SHAPE)
- task report (PDF)
- single field boundaries (SHAPE)
- CCI.Command field database (import from CCI50,100,200)



Section Control

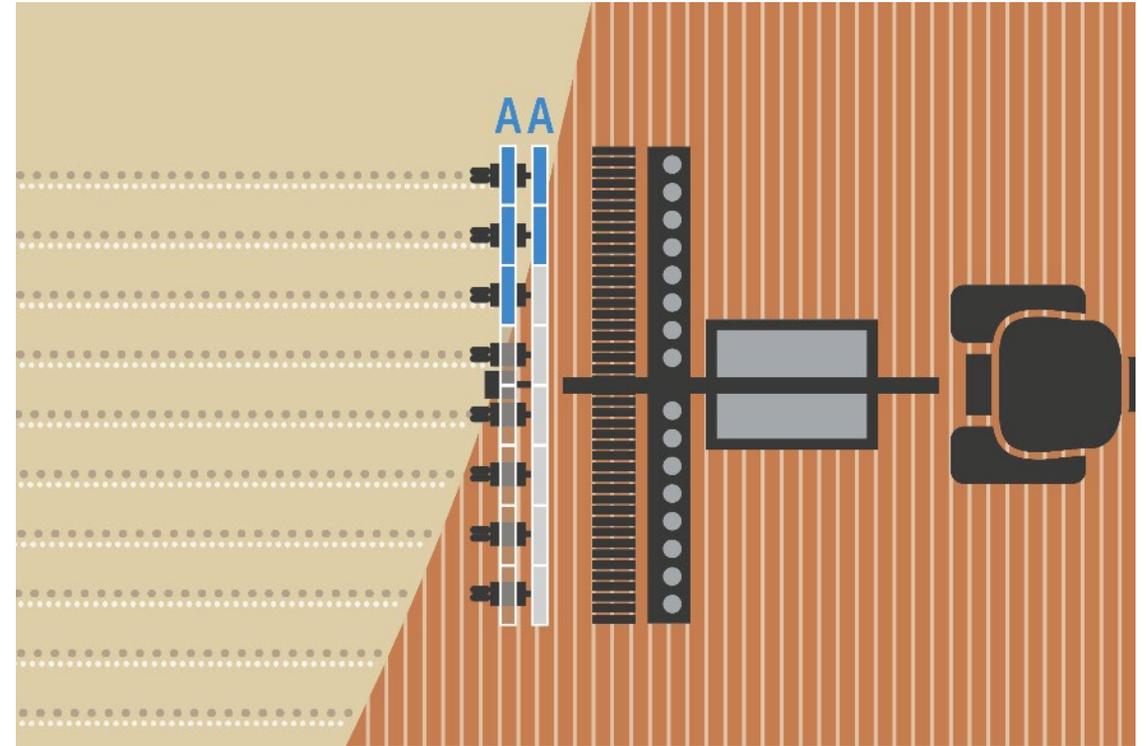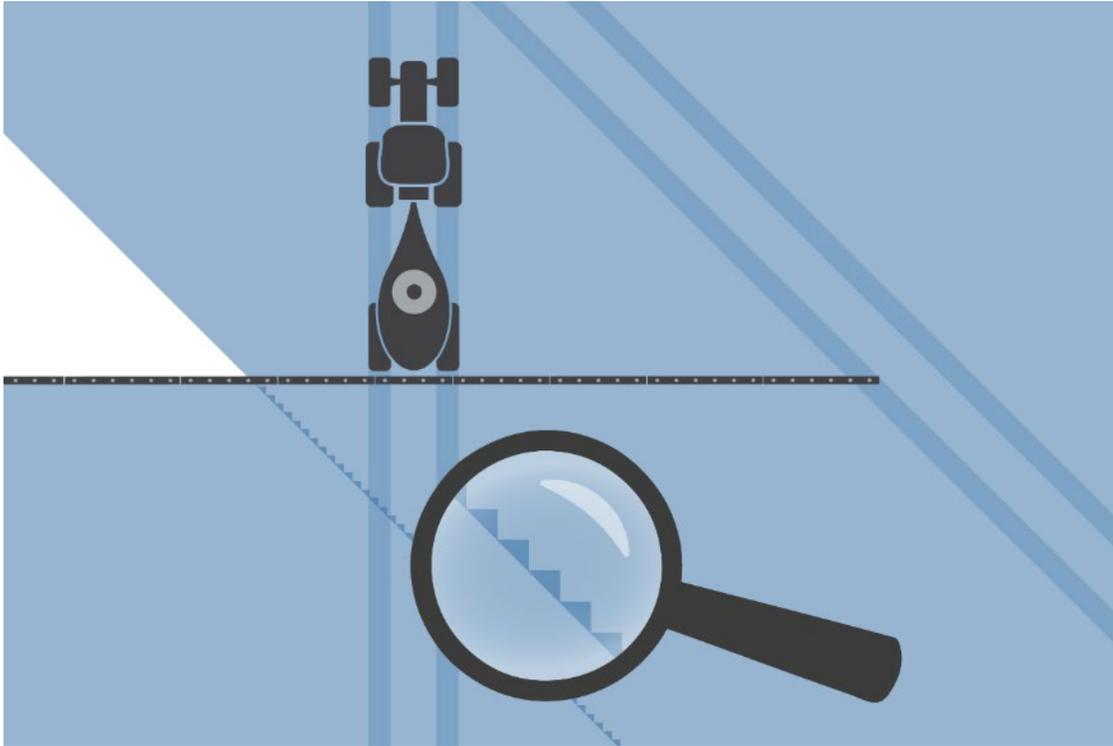


Section Control automatically switches up to 254 sections from one machine and up to four independent Booms.

It supports seed drills, planters, fertilizer spreaders, sprayers, universal spreaders, slurry tankers, mowers and rakes.




Section Control

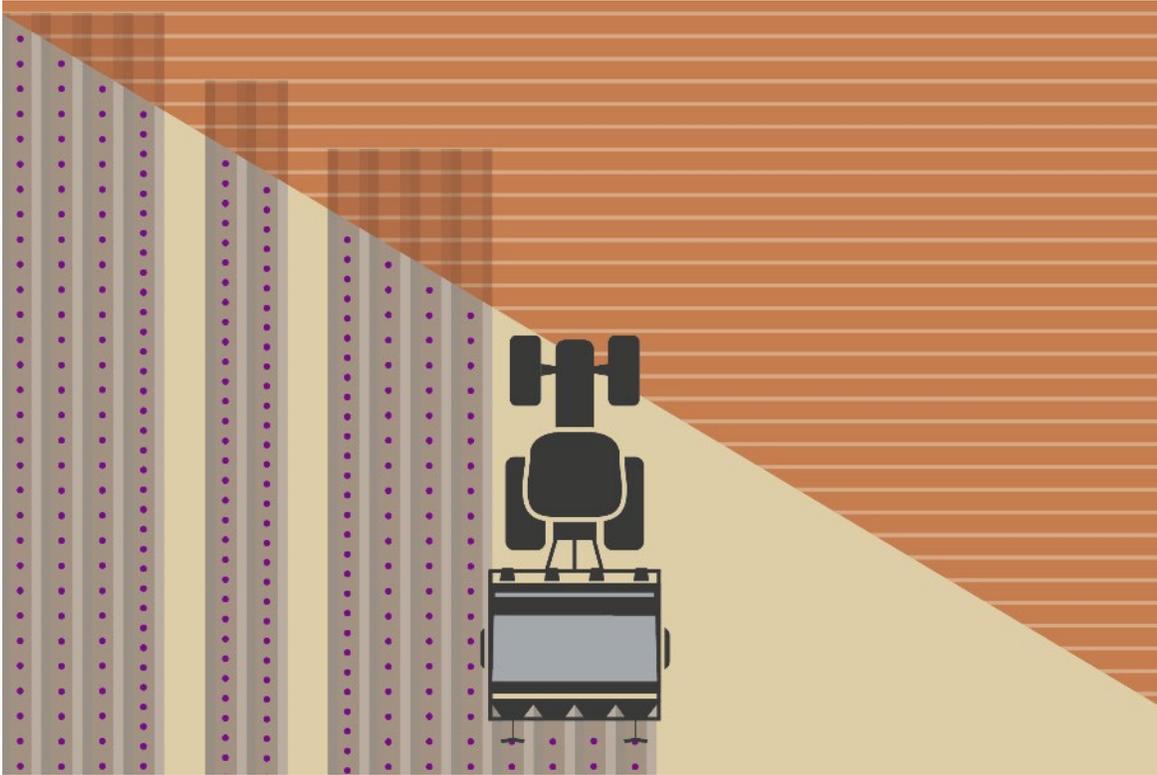

With the headland function, surfaces can be disabled for processing to work the field interior first, e.g. for planting potatoes as well as plant protection.

Circular headlands or individual headlands (only at the head ends) can be created.




Rate Control



Rate Control enables the import of maps for the site-specific application in the shape or ISO-XML format.

Data are supported as mass, volume, distances, count and percent.


NEW: 32 Control Points allow a different application rate on each dosing unit of the machine for even more precision. Prerequisite is a machine that supports this function.

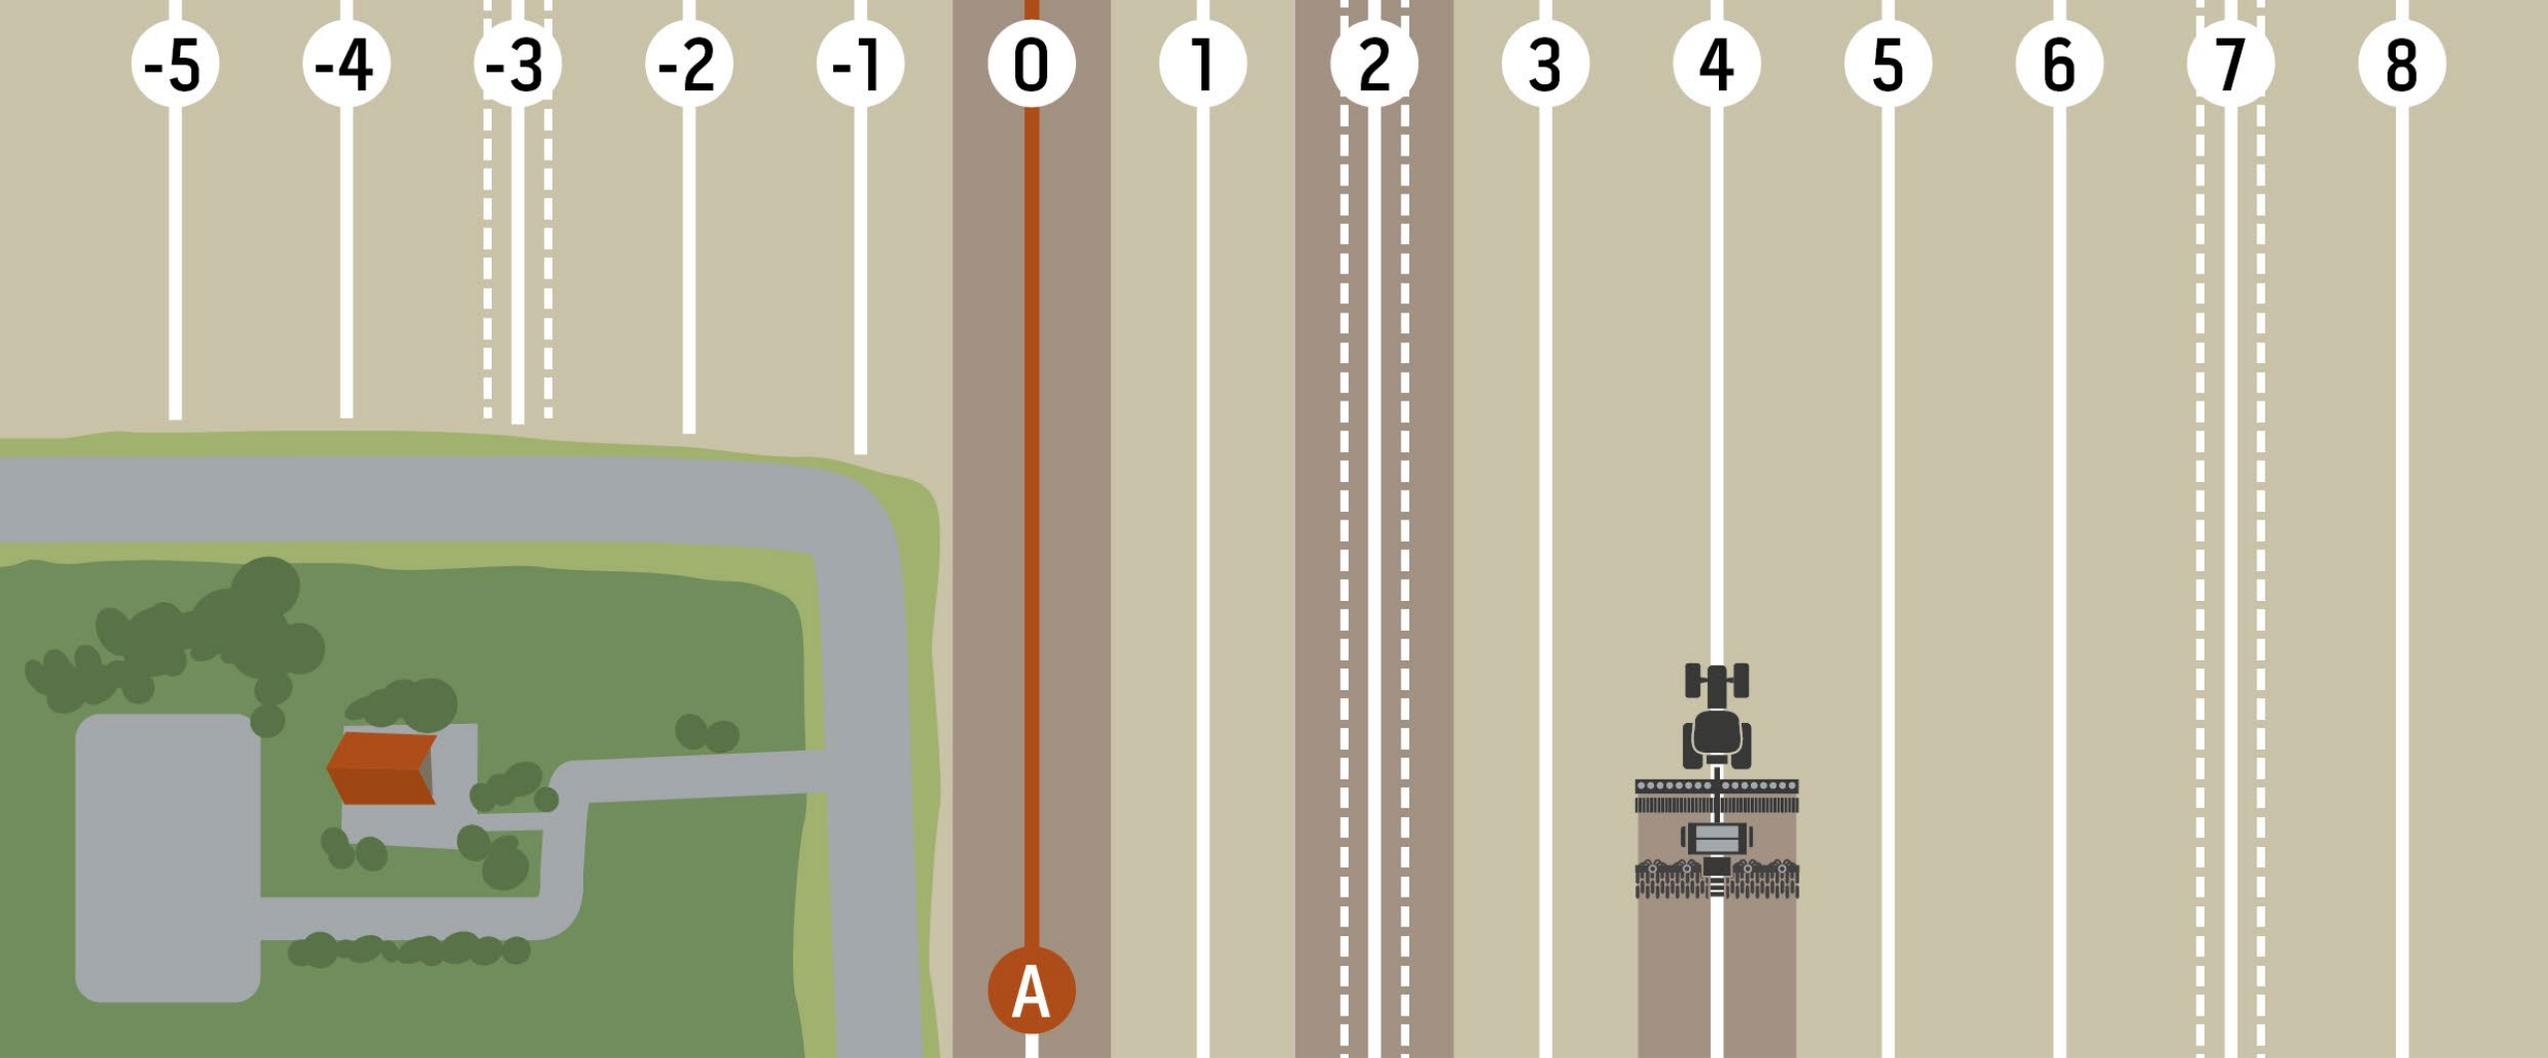


Tramline Control

Tramline Control automatically switches tramlines via GPS. Prerequisite is a machine which also supports this function. When sowing or planting this function can also be used in beds, the tramlines are nevertheless created exactly.


0



1

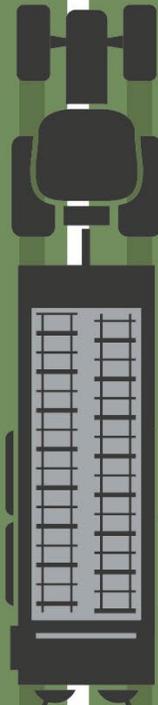

2

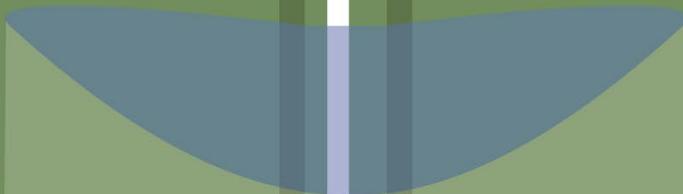


Parallel Tracking

Parallel Tracking is a parallel driving aid. The current deviation from the track is visually displayed. This avoids overlaps or gaps in the application of fertilizers and pesticides on grassland or in pre-emergence work.




CCI.Convert

Without Peer Control

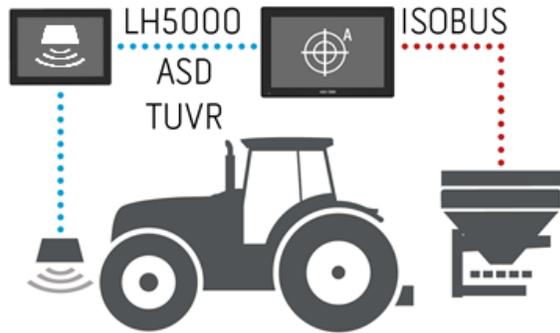

With Peer Control

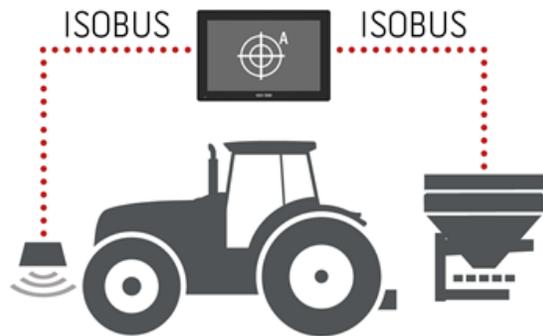

- Converts the data from nutrient sensors into machine readable ISOBUS messages

- Supports LH 5000, ASD und TUVR

NEW

- ASD Section Control

NEW

- Peer Control


- the sensor can be connected directly to the ISOBUS
- an additional display is no longer needed

NEW



- agricon app

- Settings for the N-sensor can be made directly on the CCI terminal

Automatic rear view camera

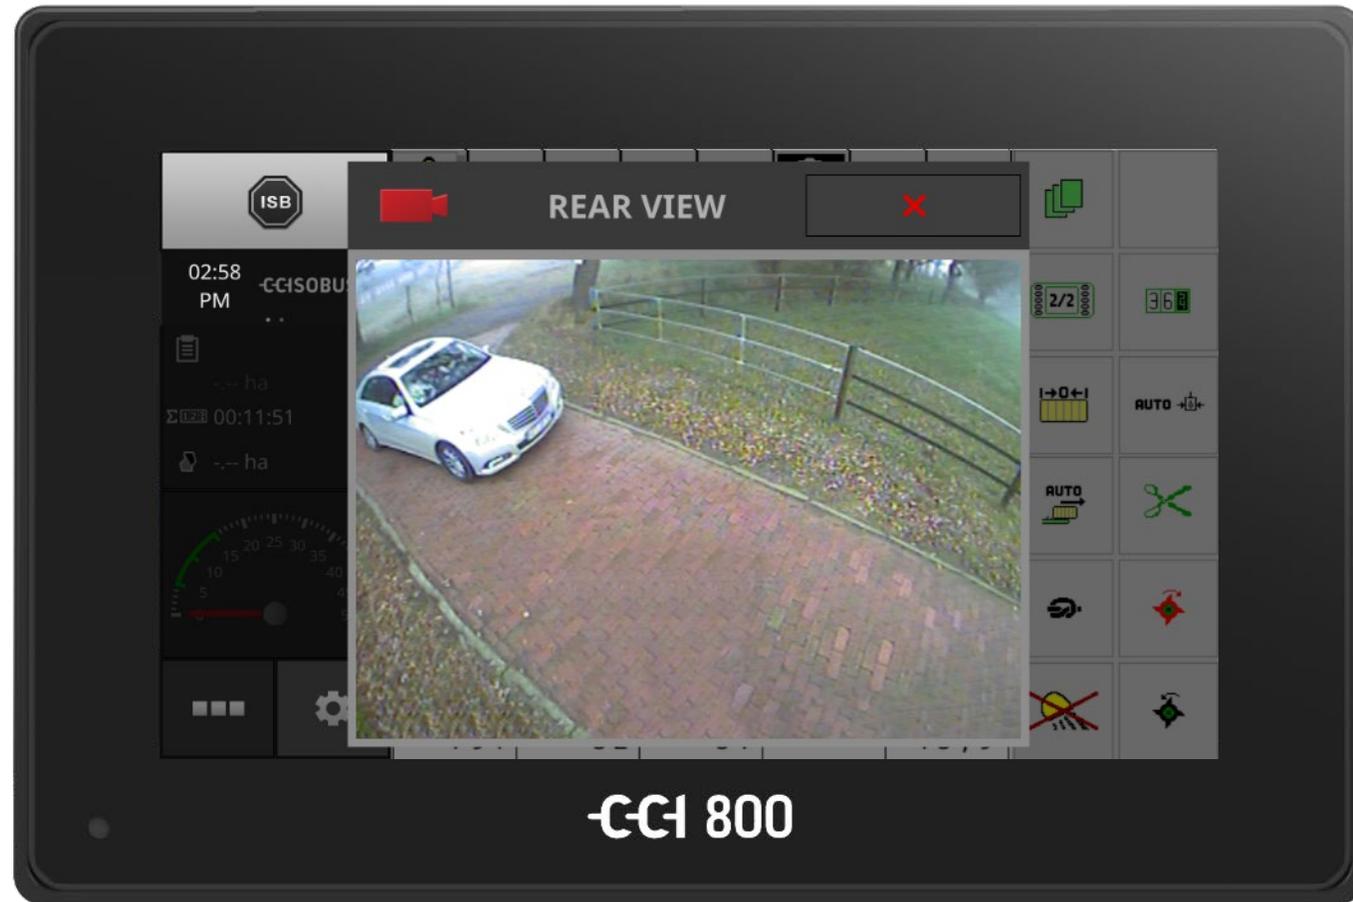

AEF certification requested*

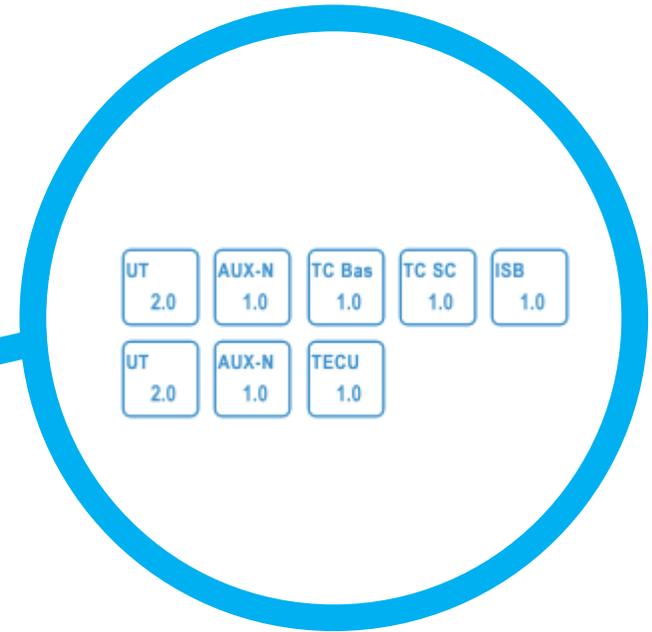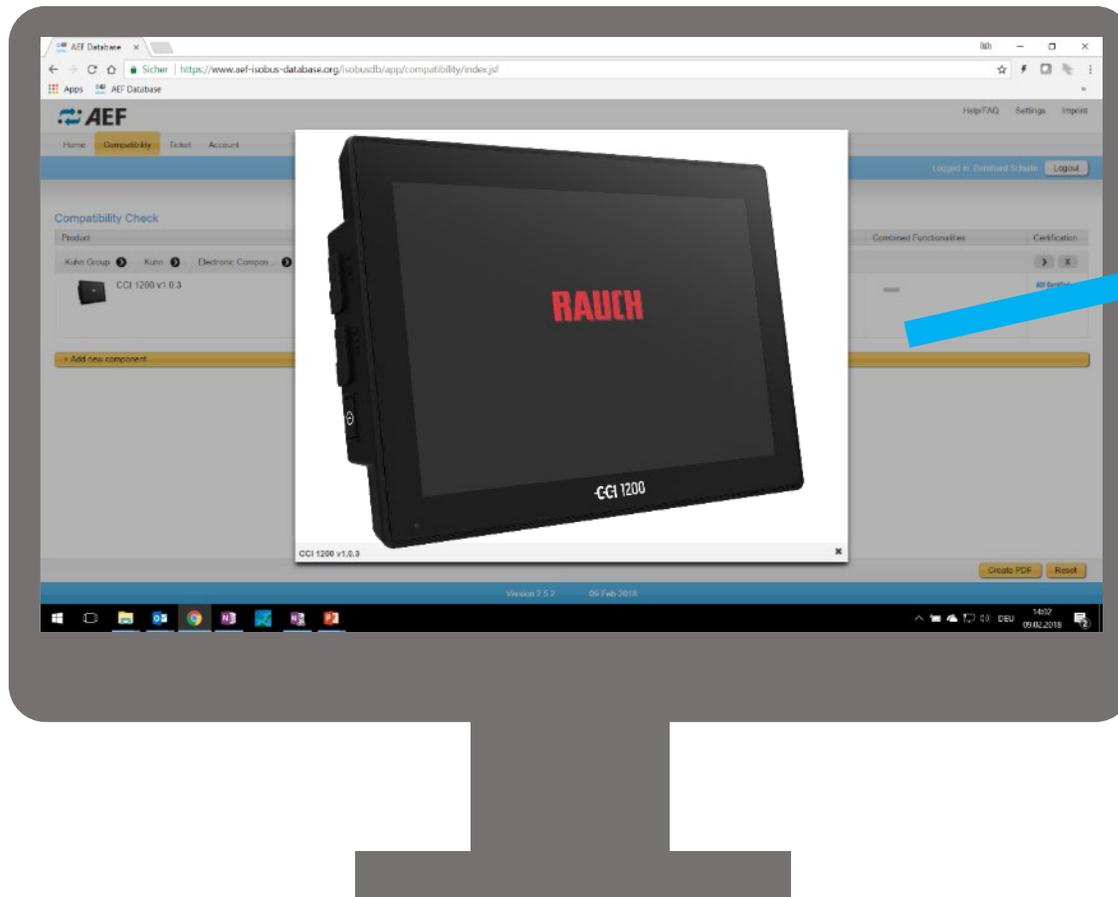

CCI 1200 vs. CCI 800

Welcome to the family




-CCI 800

-CCISOBUS


be flexible

stay focused

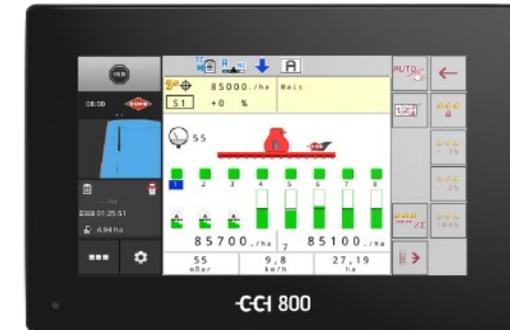

Software


CC-1200



Flexible Layout



Multi Touch



2x Universal Terminal



GPS Precision



Help System


CC-800



Focused Layout



Multi Touch



Universal Terminal



GPS Precision



Help System

Same CC.OS for both Terminals

CCISOBUS

Hardware



CCI 50
display size 5.6"
resistive touch
200 x 180 x 65 mm
0.9 kg
IP 65 protection



CCI 100/200
display size 8.4"
resistive touch
250 x 240 x 92 mm
1.5 kg
IP 65 protection



CCI 800
display size 8.0"
capacitive touch
221 x 151 x 55 mm
1.1 kg
IP 65 protection



CCI 1200
display size 12.1"
capacitive touch
311 x 213 x 66 mm
2.0 kg
IP 65 protection

Hardware



2 x USB

1 x USB



Same connectors – same cables.